

XD12PF

POWERED GM AUDIO

PASSIVE / BI-AMP
DOUBLE 12' LINE ARRAY



12W750

2 x 1200W 4Ω 8Ω 16Ω




ND1460

1 x 200W 8Ω 16Ω



HEAVY DUTY

2800W
PROGRAM POWER

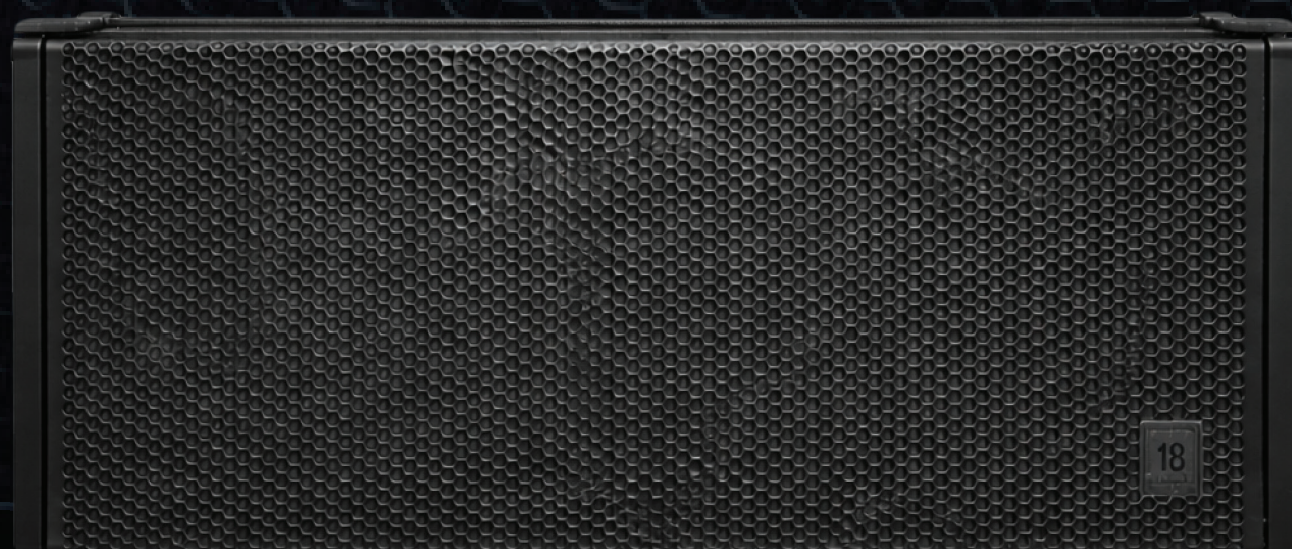

FEATURES:

12W750 Ferrite -----

- 105 dB SPL 1W / 1m sensitivity
- 75 mm (3 in) Interleaved Sandwich Voice coil (ISV)
- Frequency Range 50Hz - 4600Hz
- Weather protected cone and plates for outdoor use

ND1460 Neodymium -----

- 109 dB 1W / 1m average sensitivity
- 1.4 in exit throat
- Frequency Range 500Hz - 20KHz
- Recommended crossover 800Hz
- 3 in edge wound aluminum voice coil
- Pure Titanium diaphragm assembly
- Neodymium magnetic structure
- Excellent thermal exchange
- Flux Density 1.9T

ORIGINAL
18SOUND ITALY SPEAKERS



+91 98410 31505
+91 98840 31505



gmgi14@gmail.com
gmgi14@gm.audio.co.in



14, Woods Road, Chennai - 600002
Tamil Nadu, India.